

## MH6040 Constant-Directivity Manifold Technology® Horn System

- For high-performance speech and music systems in large venues, indoors and out
- High acoustic output over a wide bandwidth (100-4,000 Hz)
- Suitable as a stand-alone speech system when funds are limited
- Two 10-inch DL10X-SH drivers manifolded on a 60° x 40° constant-directivity horn.
- Response to 100 Hz eliminates supplemental low-frequency systems in many applications
- Large mouth has high directivity at low frequencies
- Increased intelligibility

### SPECIFICATIONS:

The following specifications are in accordance with or exceed the AES Recommended Practice for Specifications of Loudspeaker Components Used in Professional Audio and Sound Reinforcement Systems (AES2-1984; ANSI S4.26-1984).

**Frequency Response, Measured in Far Field, Calculated to One Watt at One Meter on Axis, Swept One-Third-Octave Pink Noise, Anechoic Environment (see Figure 1):**

100–4,000 Hz

**Low-Frequency 3-dB-Down Point:**

150 Hz

**Usable Low-Frequency Limit (10-dB-Down Point):**

100 Hz

**Average Efficiency:**

25%

**Long-Term Average Power Handling Capacity per EIA RS-426A (see Power Handling section):**

600 watts

**Maximum Long-Term Mid-Band Acoustic Output:**

150 watts

**Sensitivity, 1 Watt (into nominal impedance) at 1 Meter, Anechoic Environment, Band-Limited Pink-Noise Signal:**

107 dB

**Dispersion Angle Included by 6-dB-Down Points on Polar Responses, Indicated One-Third-Octave Bands of Pink Noise, 200 Hz to 2,000 Hz, Horizontal (see Figure 3):**

60° (±20°)

**315 Hz to 2,000 Hz, Vertical (see Figure 4):**

40° (+20°, -10°)

**Directivity Factor  $R_0$  (Q), 500 Hz–2,000 Hz Median (see Figure 5):**

24.0

**Directivity Index  $D_i$  (10 log  $R_0$ ), 500 Hz to 20,000 Hz Median (see Figure 6):**

10.2 dB (+0.9, -1.1 dB)

**Transducer Complement:**

Two DL10X-SH manifold drivers with Kevlar® epoxy composite cones<sup>1</sup>

**System Impedance, Drivers in Parallel, Nominal/Minimum (mid-bass section):**

8.0/5.9 ohms

**Polarity:**

A positive voltage applied to the positive (+) sides of the DL10X-SH input cables produces a positive acoustic pressure in the horn throat

**Construction,**

**Main Horn Bell and Driver Back Covers:**

One-piece black polyester and fiberglass laminate with composite reinforcement

**Hanging Hardware:**

Integral black 10-gauge polyester powder-coated steel

**Mechanical Driver Protection:**

Integral grille/protection screen built into the manifold chamber

**Input Connections:**

Heavy-duty 12-AWG oxygen-free copper cable, unterminated, in exterior grade UV-stabilized flexible conduit

**Dimensions (see Figure 7),**

**Height:**

149.9 cm (59.0 in.)

**Width:**

99.1 cm (39.0 in.)

**Length:**

187.3 cm (73.9 in.)

**Packed Length:**

203.2 cm (80.0 in.)

**Weight:**

70 kg (155 lb)

**Shipping Weight:**

75 kg (166 lb)

**Packing:**

Wooden pallet

### DESCRIPTION


The Electro-Voice MH6040 is a wide-range, 60° x 40° mid-bass/high-frequency constant-directivity horn-and-driver system. It covers the frequency range of 100 Hz to 4,000 Hz with minimal equalization. The MH6040 combines two world-pioneering concepts developed by Electro-Voice: constant-directivity horns and Manifold Technology®. The MH6040's potentially high acoustic output, stable directional characteristics, and extended low-frequency performance make it highly suitable for music and speech reinforcement in large indoor and outdoor venues.

At the heart of the MH6040 are two DL10X-SH 10-inch water-resistant drivers (U.S. Patent No. 4,547,632). The driver has been specially developed for the MH series of horns. It incorporates a unique diaphragm construction of Kevlar® and epoxy.<sup>1</sup> This combination of high-technology materials produces a diaphragm with a strength-to-weight ratio on the order of twice that of conventional materials. Each driver is integrally mounted to the fiberglass horn bell via a heavy-duty mounting bracket and proprietary Aperiodic Enhancer™ phase plug.


Manifolding allows the output of two or more drivers to be summed without the usual detrimental interference problems in the pass-band. There are a number of additional advantages to

1. Kevlar® is a registered trademark of Du Pont.


**FIGURE 1 — Axial Frequency Response (1 watt/1 meter)**

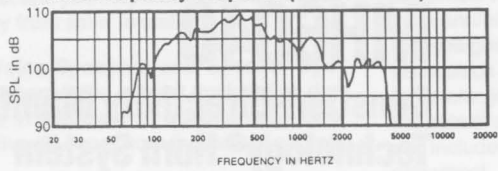


**FIGURE 2 — Dimensions**

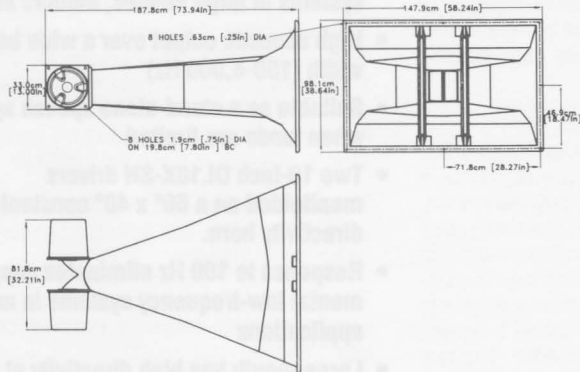


**FIGURE 3 — Impedance Response**

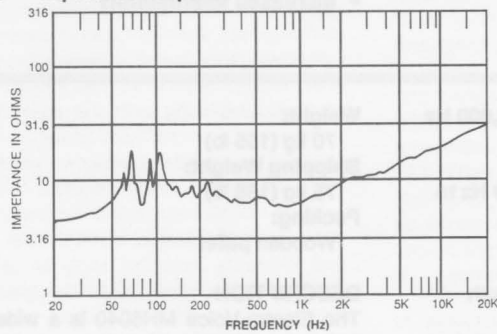


**FIGURE 4 — Distortion Response, 10% Power**

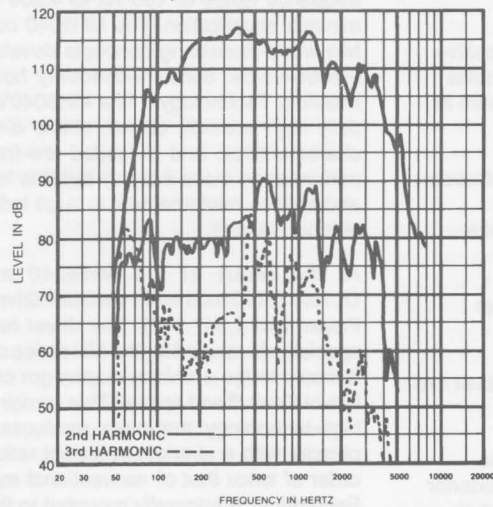


**FIGURE 5 — Beamwidth Response**

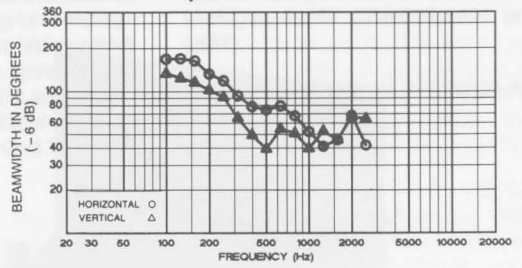

**FIGURE 6 — Directivity Response**

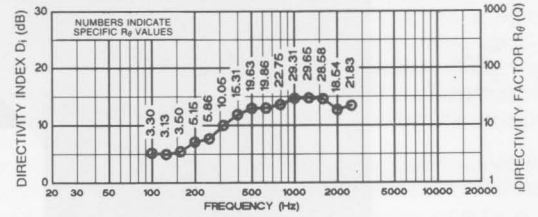

**FIGURE 7 — Polar Response**

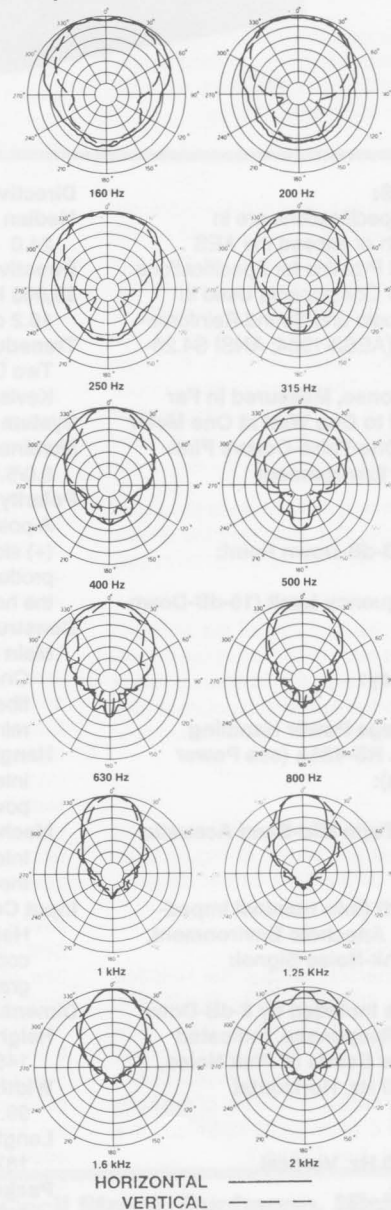

manifolding, including reduced distortion (see Figure 4) and increased efficiency at certain frequencies. There is also redundancy built into the system; in the unlikely event of a driver failure, one remains available. The DLX10-SH drivers are contained and sealed within fiberglass covers optimally tuned for maximum low-end performance and displacement control.

#### INSTALLATION

The MH6040 is designed to be suspended safely and easily. The integral mounting brackets at the rear should be used as the main structural hanging location. There are also two structural hanging locations on the rear of the front flange to aim and stabilize the device. Electro-Voice recommends that each MH6040 be independently supported. The MH6040 can be easily suspended with either the 60° or the 40° coverage pattern horizontal.

Electrical connections can be made using standard electrical boxes or weather-resistant boxes if used in adverse conditions. The mounting brackets incorporate a predrilled flange to aid electrical box mounting.

If the MH6040 is suspended, it is recommended that the unit be inspected at least once a year. If any sign of weakness is detected, remedial action should be taken immediately.

#### EQUALIZATION AND SUBPASSBAND PROTECTION

The MH6040 exhibits typical constant-directivity horn characteristics, i.e., roll-off at the frequency extremes. At higher frequencies, the roll-off approximately matches the power-response of the DL10X-SH (6 dB per octave). At lower frequencies, directivity is lost when the mouth is no longer large enough to maintain directional control. These two consequences can be observed in the "humped" response in Figure 1. Equalization can be easily applied with a graphic equalizer to give a flat response.

Electro-Voice strongly recommends the use of a 100-Hz high-pass filter to protect the drivers from unnecessary excursion and thermal stress.

#### DIRECTIVITY

The axial directivity factor  $R_0$  of the MH6040 was computed at each of the one-third-octave center frequencies over the frequency range noted from the horizontal/vertical polars shown in Figure 6. Directivity index ( $D_i$ ) was taken over the same frequency range.

#### BEAMWIDTH

Plots of the MH6040's 6-dB-down total included beamwidth angles are shown in Figure 5 for each of the one-third-octave center frequencies noted.

#### POLAR RESPONSE

The directional characteristics of the MH6040 were obtained by selecting the horizontal and vertical details from a full set of polar data measured in EV's large anechoic chamber. The measurement microphone was placed 6.1 m (20 ft) from the center of rotation of the horn which, in turn, is 0.94 m (3.08 ft) behind the mouth of the horn. See Figure 7.

#### POLARITY OF THE DL10X-SH DRIVERS

For Manifold Technology® to operate correctly, the drivers must be operated "in phase." In other words, for parallel connection, the DL10X-SH's must be connected so the negative terminals of the drivers are connected together, and the positive terminals are connected together.

#### SERVICE

In the unlikely event the MH6040 requires service, each DL10X-SH easily can be replaced or serviced by removing the back cover and then removing the driver. A service data sheet is available from Electro-Voice.

#### POWER HANDLING CAPACITY

To our knowledge, Electro-Voice was the first U.S. manufacturer to develop and publish a power test closely related to real-life conditions. A random-noise input signal is used because it contains many frequencies simultaneously, just like real voice or instrument program. The signal contains more energy at extremely high and low frequencies than typical actual program, adding an extra margin of reliability. The test combines not only the overall "long-term average" or "continuous" level—which our ears interpret as loudness—but also short-duration peaks which are many times higher than average, just like actual program. The long-term average level stresses the speaker thermally (heat). The instantaneous peaks test mechanical reliability (cone excursion). Note that the sine-wave test signals sometimes used have a much less demanding peak value relative to their average level. In actual use, long-term average levels exist from several seconds on up. The test performed lasts for eight hours, adding another extra level of confidence.

Specifically, the MH6040 mid-band section is designed to withstand the power test described in EIA Standard RS-426A. The EIA test spectrum is applied for eight hours. The spectrum is obtained by filtering white noise (a particular type of random noise with equal energy per bandwidth). The filter applies 6-dB-per-octave slopes below 40 Hz and above 318 Hz. When measured with a one-third-octave constant-percentage analyzer, this filter produces a spectrum whose 3-dB-down points are at 100 Hz and 1,200 Hz with a 3-dB-per-octave slope above 1,200 Hz. This shaped signal is then further filtered with an 80-Hz, 12-dB-per-octave high-pass filter to prevent out-of-passband displacement. The amplifier is set to provide 600 watts into the 3.45-ohm EIA equivalent impedance (45.5 volts). Amplifier clipping sets instantaneous peaks at 6 dB above the continuous power or 2,400 watts peak (91.0 volts).

#### ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The horn shall be of the constant-directivity type. It shall produce a horizontal beamwidth (6-dB-down angle) of 60°, deviating no more than 20° from this angle over the range of 400 Hz to 2 kHz. It shall produce a vertical beamwidth of 40°, deviating no more than +20° or -10° over the frequency range of 315 Hz to 2 kHz. In addition, it shall provide an acoustic load to below 100 Hz.

The MH6040 shall operate over the range of 100 Hz to 4,000 Hz, and be driven by two 10-inch, weather-resistant drivers with high-technology cones of Kevlar® and epoxy.<sup>1</sup> The patented Manifold Technology® technique shall be exploited and result in a power-handling capacity of 600 watts per EIA Standard RS-426. The average axial sensitivity shall be 107 dB SPL at 1 meter with 2.83 volts applied.

The horn bell manifold chamber and back covers shall be constructed of fiberglass, foam and polyester resin. Two steel rails shall be provided to strengthen the horn mouth. The horn shall have an integral rear mounting bracket made of black powder-coated 10-gauge steel. Brackets shall be provided at the front of the horn to stabilize and aim the MH6040.

The horn shall be 149.9 cm (59.0 in.) high, 99.1 cm (39.0 in.) wide, 187.3 cm (73.9 in.) long and weigh 75 kg (165 lb).

The horn shall be the Electro-Voice MH6040 coaxial constant-directivity Manifold Technology® horn.

#### WARRANTY (Limited)

Electro-Voice products are guaranteed against malfunction due to defects in materials or workmanship for a specified period, as noted in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual, beginning with the date of original purchase. If such malfunction occurs during the specified period, the product will be repaired or replaced (at our option) without charge. The product will be returned to the customer prepaid. **Exclusions and Limitations:** The Limited Warranty does not apply to: (a) exterior finish or appearance; (b) certain specific items described in the individual product-line statement(s) below, or in the individual product data sheet or owner's manual; (c) malfunction resulting from use or operation of the product other than as specified in the product data sheet or owner's manual; (d) malfunction resulting from misuse or abuse of the product; or (e) malfunction occurring at any time after repairs have been made to the product by anyone other than Electro-Voice or any of its authorized service representatives. **Obtaining Warranty Service:** To obtain warranty service, a customer must deliver the product, prepaid, to Electro-Voice or any of its authorized service representatives together with proof of purchase of the product in the form of a bill of sale or receipted invoice. A list of authorized service representatives is available from Electro-Voice at 600 Cecil Street, Buchanan, MI 49107 (616/695-6831 or 800/234-6831) and/or Electro-Voice West, at 8234 Doe Avenue, Visalia, CA 93291 (209/651-7777 or 800/825-1242). **Incidental and Consequential Damages Excluded:** Product repair or replacement and return to the customer are the only remedies provided to the customer. Electro-Voice shall not be liable for any incidental or consequential damages including, without limitation, injury to persons or property or loss of use. Some states do not allow the exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you.

1. Kevlar® is a registered trademark of Du Pont.

