




RE3-ACC-CXU10 10 foot, 50 ohm BNC coax cable

- High-quality RG-58U coax cable
- 50 ohm
- Robust male BNC connectors

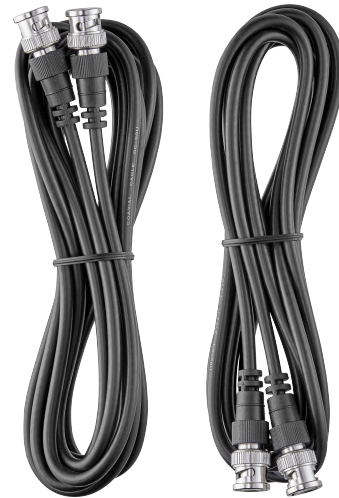

The CXU10 is a pair low-loss, 10 foot coax cables for UHF wireless microphone systems. Their low-attenuation characteristics make them ideal for system installations requiring separation between antenna and receiver locations.

Technical specifications

Cable type:	Coaxial RG-58U
Connector type:	BNC - BNC
Impedance:	50 ohms
Estimated attenuation:	2.2 dB
Dimensions (length):	10' (3.05 m)
Diameter:	0.195" (4.95 mm)
Color:	Black
Net weight:	4.7 oz. (135 g)
Gross weight:	4.9 oz. (140 g)

Installation/configuration notes

To install the coax cable, do the following:

1. Insert the cable-mounted male BNC connectors onto antenna jacks at receiver (or splitter) and antenna.

2. Turn connector clockwise to lock BNC connectors onto BNC jacks.

Compatible products

Order number	Description
RE3-ACC-RMK1	Rack mount kit for single RE3 receiver
RE3-ACC-RMK2	Rack mount kit for two RE3 receivers
RE3-ACC-CXUF	Rear to front mount antenna cable kit
RE3-ACC-PLPA	Passive log periodic antenna, 470-960MHz
RE3-ACC-ALPA	Active log periodic antenna, 470-960MHz
RE3-ACC-AASP	2-in x 8-out antenna splitter 470-960MHz
RE3-ACC-PASP	1 x 2 passive antenna splitter kit
RE3-ACC-RFAMP	Active RF antenna booster, 470-960MHz

Parts included

Quantity	Component
2	50 ohm antenna cables
1	Engineering datasheet
1	Warranty and product documentation information card

Ordering information

RE3-ACC-CXU10 10 foot, 50 ohm BNC coax cable

10 foot, 50 ohm BNC coax cable for UHF wireless systems (pair), black

Order number **RE3-ACC-CXU10**

Represented by:

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany

Bosch Security Systems, Inc.
12000 Portland Avenue South
Burnsville MN 55337
USA

www.electrovoice.com