


**Sx80SMB**  
**Stainless Steel**  
**Mounting Bracket Kit**



## Key Features:

- Allows for a wall or ceiling mounting of an Sx80 speaker system
- Available in black (Sx80SMB), white (Sx80-SMB-W), and natural finish stainless (Sx80-SMB-U)
- Recommended for use with Sx80PI and Sx80-PIX

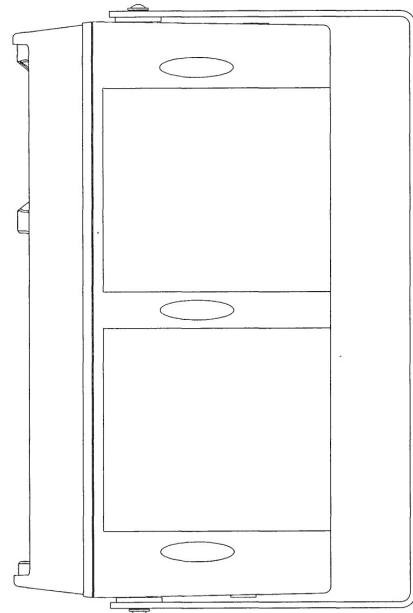

## General Description:

The Electro-Voice® Sx80SMB is a stainless steel mounting bracket for installing the Sx80 loudspeaker on a wall or a ceiling. The kit consists of two nylon washers, two friction washers, two M6 x 20mm phillips hex washer head screws, and one U-bracket.

## Technical Specifications:

|                                     |                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Wall/Ceiling Mounting Holes:</b> | Three in-line 6.35mm (0.25") diameter clearance holes, centers spaced 152mm (6.0") apart                   |
| <b>Enclosure Mounting Holes:</b>    | Two 6.35mm (0.25") diameter clearance holes, on the ends of the bracket                                    |
| <b>Material:</b>                    | 8-Gauge 316 Stainless Steel                                                                                |
| <b>Finish:</b>                      | Sx80SMB - Black Powder Coat<br>Sx80SMB-W - White Powder Coat<br>Sx80SMB-U - Natural Finish Stainless Steel |
| <b>Parts Supplied:</b>              | (2) Nylon Washers<br>(2) Friction Washers<br>(2) M6 x 20mm Phillips Hex Wshr Head Screws<br>(1) U-Bracket  |
| <b>Dimensions:</b>                  | 406.4mm x 210.6mm x 40.1mm<br>(16.00" x 8.29" x 1.58")                                                     |
| <b>Net Weight:</b>                  | 1.15 kg (2.53 lb)                                                                                          |
| <b>Shipping Weight:</b>             | 1.60 kg (3.53 lb)                                                                                          |



# Wall/Ceiling Mounting Instructions:

Refer to Figure 1 and the Parts List for the following steps.

1. Attach the U-bracket (D) to the wall or ceiling using fasteners that are suitable for the wall or ceiling material (not supplied). Figure 2 is a dimensional drawing of the U-bracket. It gives dimensions for the bracket size, the mounting holes, and the holes used to attach the speaker to the bracket.
2. Remove the paper backing from one of the friction washers (B) and attach these to the U-bracket as shown. Be sure that the through holes on the friction washers line up with the through holes on the U-bracket.
3. Remove the hole plugs from the top and bottom of the Sx80 for the U-bracket by gently prying with a small screwdriver.
4. Mount the Sx80 to the U-Bracket with the supplied M6 screws (C), ensuring that the nylon washers (A) are mounted between the U-bracket and the screws.
5. Rotate the speaker so that the input terminal is accessible and attach the wires. Position the speaker for the desired angle and tighten the screws sufficiently so that the speaker does not inadvertently rotate.

**CAUTION:** Due to the weight of the Sx80 speaker system, it is imperative that the Sx80SMB bracket be properly secured to the wall or ceiling. The choice of fastener (not provided with the bracket kit), will be determined by the material and construction of the mounting surface.

Fig. 1 - Attaching the Sx80SMB to the Sx80 Speaker System


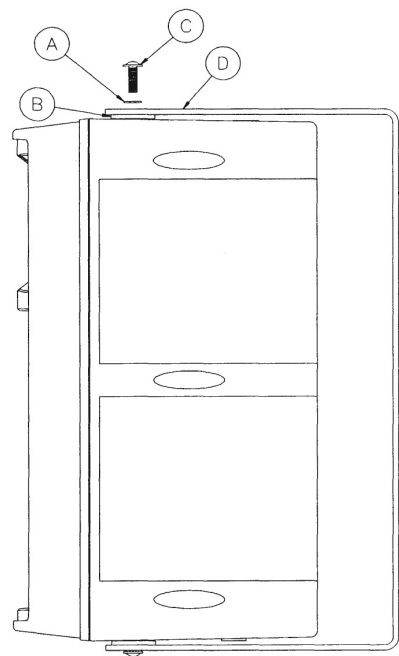


Fig. 2 - Sx80SMB Mounting Bracket Dimensions

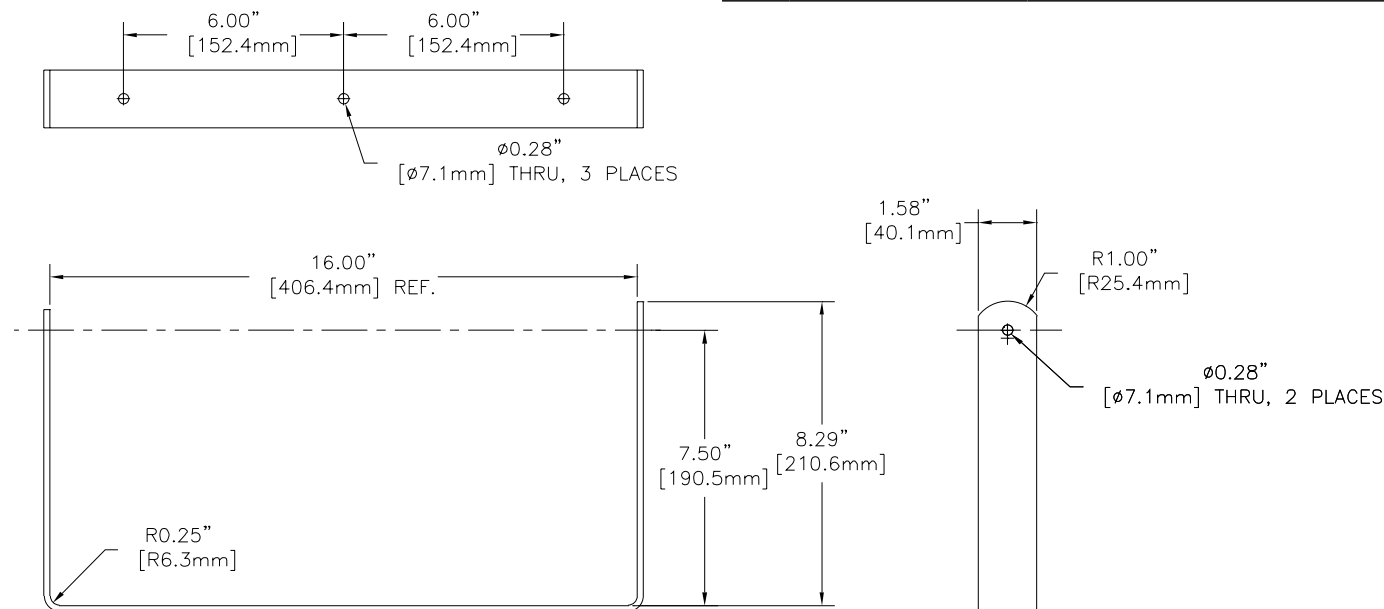

12000 Portland Avenue South, Burnsville, MN 55337  
Phone: 952/884-4051, Fax: 952/884-0043

[www.electrovoice.com](http://www.electrovoice.com)

© Bosch Communications Systems 09/2007  
Part Number LIT000147 Rev A

U.S.A. and Canada only. For customer orders, contact Customer Service at:  
800/392-3497 Fax: 800/955-6831

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:  
+ 49 9421-706 0 Fax: + 49 9421-706 265

Other International locations. For customer orders, Contact Customer Service at:  
+ 1 952 884-4051 Fax: + 1 952 887-9212

For warranty repair or service information, contact the Service Repair department at:  
800/685-2606

For technical assistance, contact Technical Support at: 866/78AUDIO

Specifications subject to change without notice.