




SxA100 Heatsink Guard

Assembly and Installation Instructions

Kit Includes:



Heatsink Guard (x2)



Zip Tie (x4)

Step 1.

Slide two zip ties into first Heatsink Guard, ribbed side of zip ties facing inward (Fig. 1).

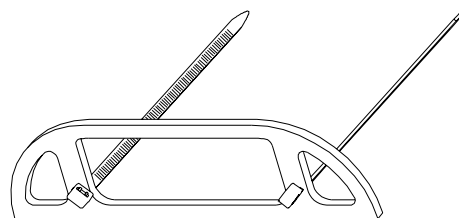


Figure 1

Step 2.

Place first Heatsink Guard on top of heatsink with zip ties in place between the fins as shown (Fig. 2).

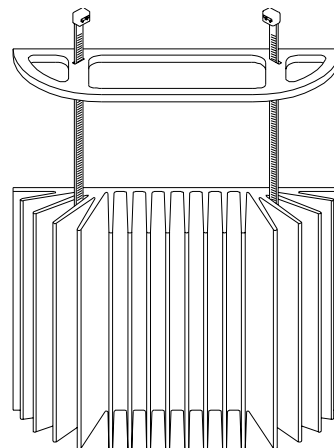


Figure 2

WARNING! HEATSINK MAY BE HOT! DO NOT ATTEMPT TO INSTALL HEATSINK GUARDS WHILE UNIT IS PLUGGED IN.

Step 3.

Slide second guard onto bottom of heatsink, putting the first two zip ties through the slots on the guard. Slide the ends of two other zip ties onto the first zip ties. Pull tight and cut off excess lengths (Fig. 3).

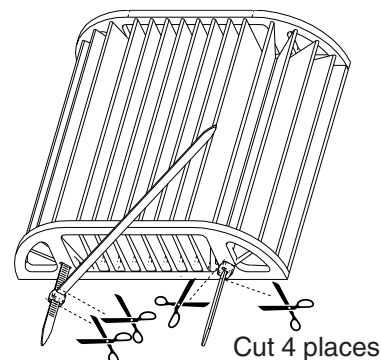


Figure 3