



**X-Line and X<sup>LC</sup> Hydra  
Plastic to Die-Cast Aluminum  
Installation Instructions**

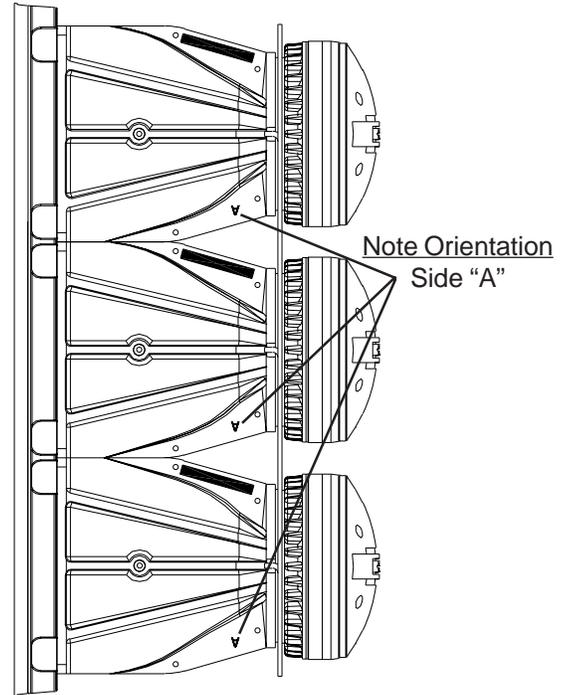



***XVLS HF Subassembly (Part Number 301889-000):***

Consists of (3) Hydras, with accoustical foam in the center (5) slots of each Hydra.

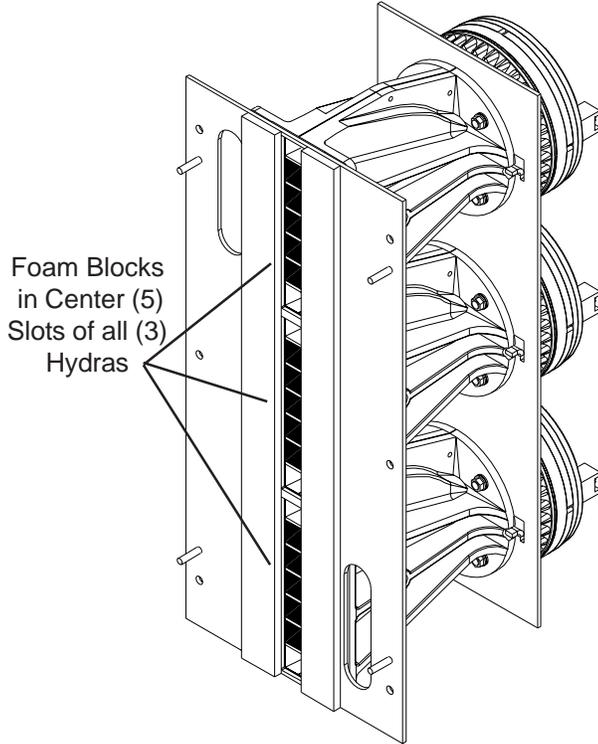



***XVLT HF Subassembly (Part Number 301890-000):***

Consists of (3) Hydras, with accoustical foam in the center (5) slots of ONLY the top and bottom Hydras.

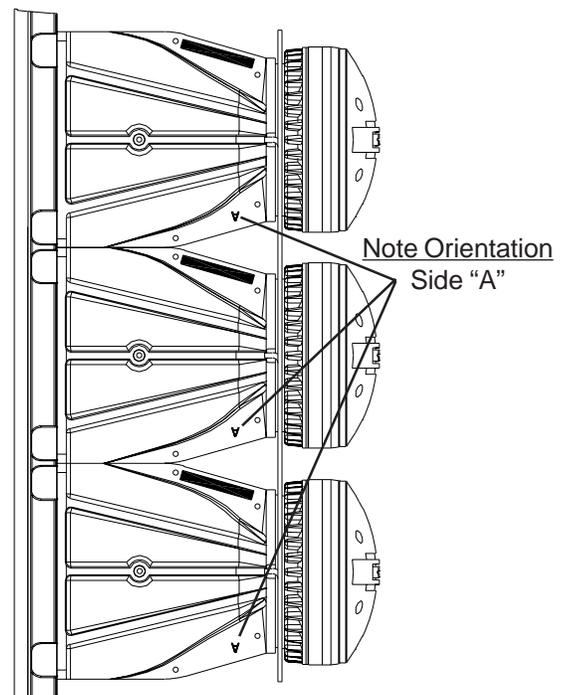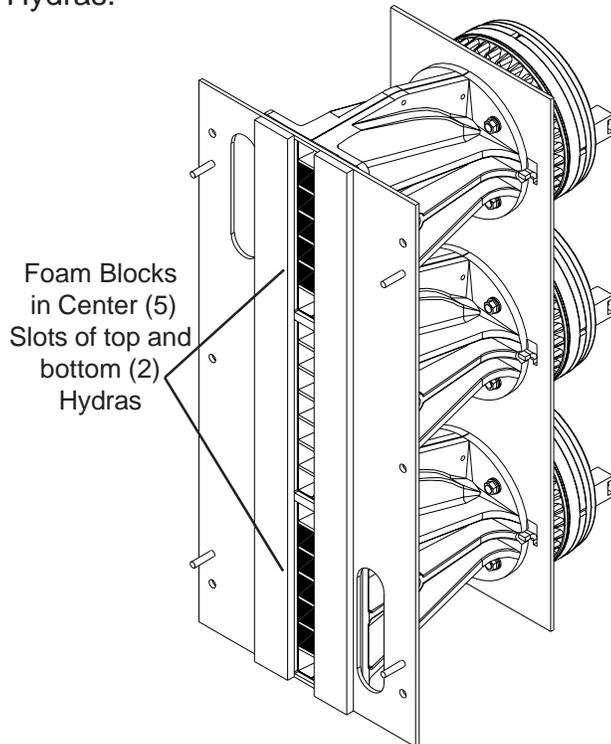

## ***XLC HF Subassembly (Part Number 301888-000):***

Consists of (2) Hydras, with accoustical foam in the top or bottom (6) slots of each Hydra.

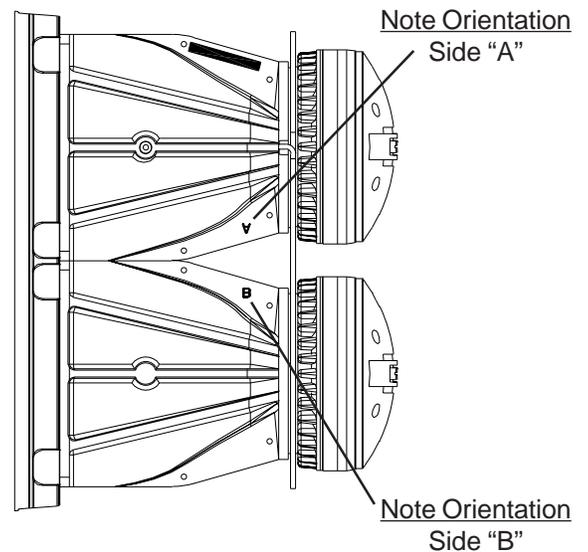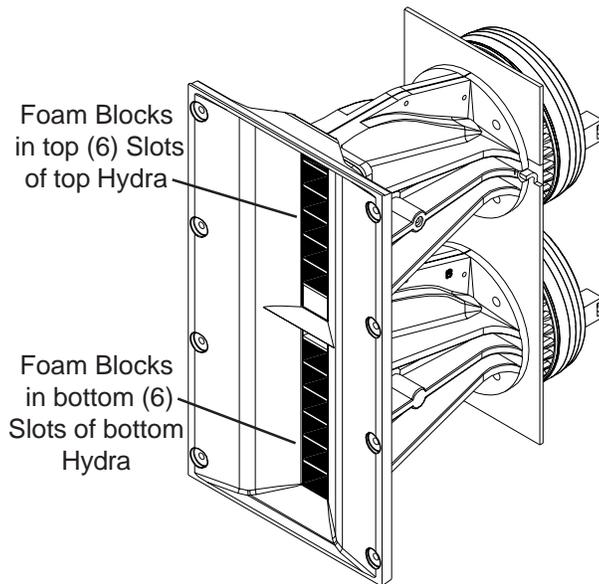

### ***Notes for all Subassemblies:***

Compression Drivers and Plates/Horns shown for visual reference only to assist in orientation of Hydra and locations of Foam Blocks during re-assembly. Compression Drivers and Plates/Horns are not included in Hydra Replacement Kits.

When re-assembling HF Subassemblies, be sure to hook up wires correctly to assure proper polarity.



12000 Portland Avenue South, Burnsville, MN 55337  
Phone:952/884-4051, Fax:952/884-0043

[www.electrovoice.com](http://www.electrovoice.com)

©Telex Communications, Inc. 4/2005  
Part Number 38110-455 Rev A

U.S.A. and Canada only. For customer orders, contact Customer Service at:  
800/392-3497 Fax: 800/955-6831

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:  
+ 49 9421-706 0 Fax: + 49 9421-706 265

Other International locations. For customer orders, contact Customer Service at:  
+ 1 952 884-4051 Fax: + 1 952 736-4212

For warranty repair or service information, contact the Service Repair department at:  
800/685-2606

For technical assistance, contact Technical Support at: 866/78AUDIO

Specifications subject to change without notice.