


NEW PRODUCTS

from

Electro-Voice®

CS20 CARDIOID CONDENSER MICROPHONE

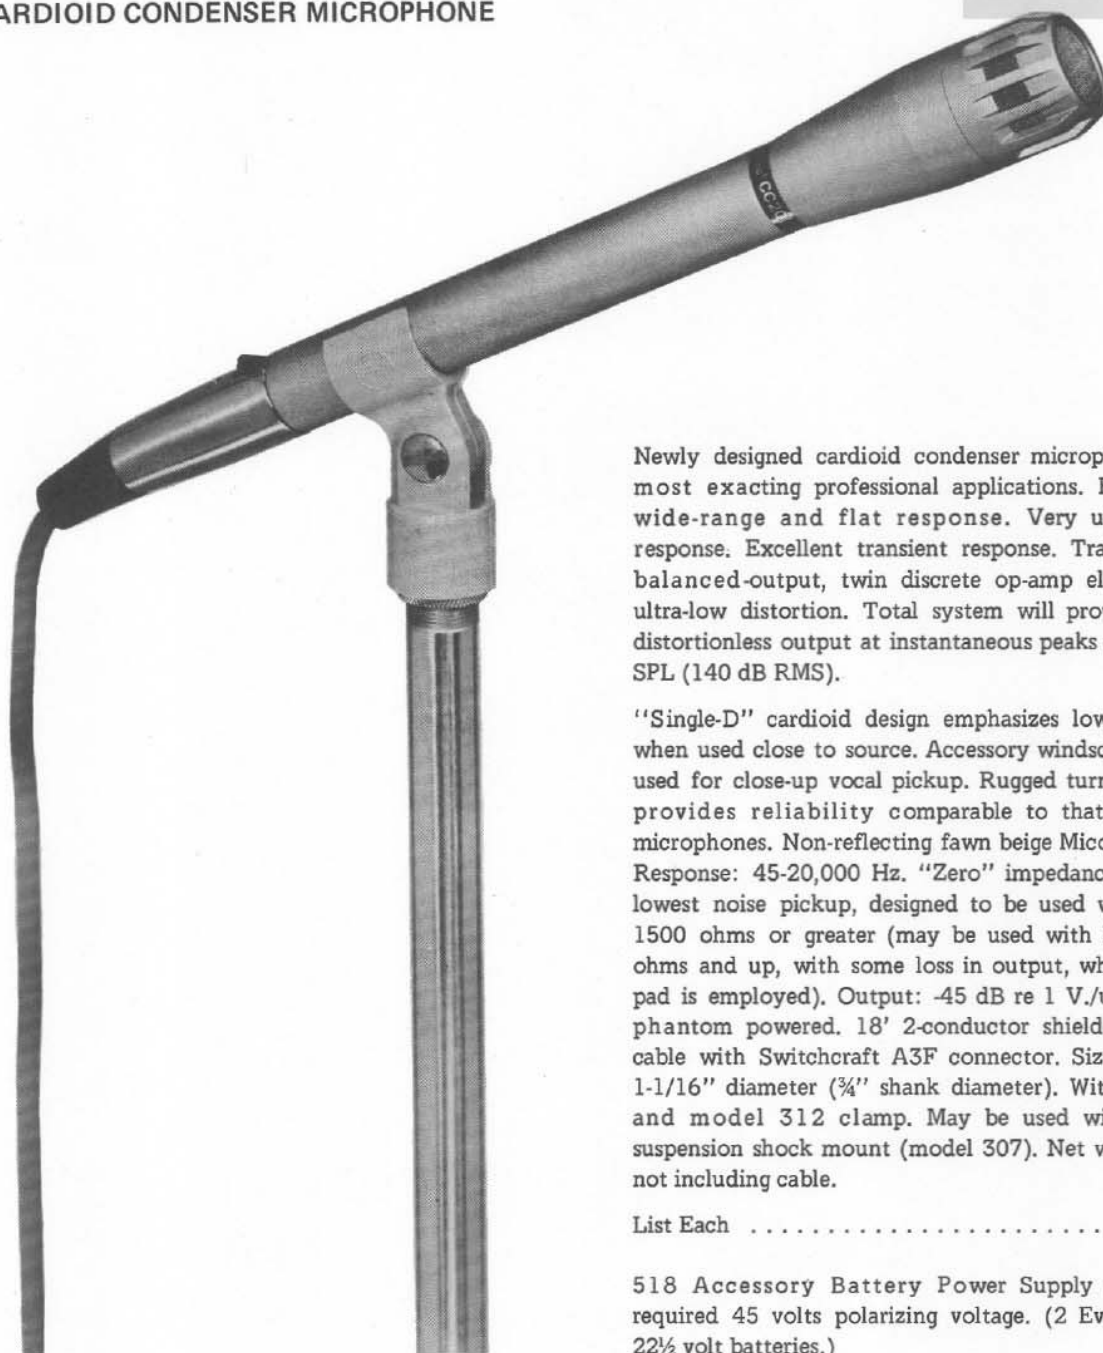

- ▶ Microphones
- Commercial Sound Products
- High Fidelity Components
- Phonograph Needles, Cartridges, and Wheels

Newly designed cardioid condenser microphone for the most exacting professional applications. Exceptionally wide-range and flat response. Very uniform polar response. Excellent transient response. Transformerless, balanced-output, twin discrete op-amp electronics for ultra-low distortion. Total system will provide virtually distortionless output at instantaneous peaks up to 150 dB SPL (140 dB RMS).

"Single-D" cardioid design emphasizes low frequencies when used close to source. Accessory windscreen must be used for close-up vocal pickup. Rugged turned steel case provides reliability comparable to that of dynamic microphones. Non-reflecting fawn beige Micomatte finish. Response: 45-20,000 Hz. "Zero" impedance output for lowest noise pickup, designed to be used with loads of 1500 ohms or greater (may be used with loads of 150 ohms and up, with some loss in output, when accessory pad is employed). Output: -45 dB re 1 V./uBar. May be phantom powered. 18' 2-conductor shielded broadcast cable with Switchcraft A3F connector. Size: 7 $\frac{3}{4}$ " long, 1-1/16" diameter ($\frac{3}{4}$ " shank diameter). With metal case and model 312 clamp. May be used with accessory suspension shock mount (model 307). Net weight: 8 oz., not including cable.

List Each\$416.50

518 Accessory Battery Power Supply provides the required 45 volts polarizing voltage. (2 Eveready #412 22 $\frac{1}{2}$ volt batteries.)