

Technical Documentation


Print Instructions



Standard Requirements:

- ▶ Paper quality must be at least matte 80% ISO white and preferably 100% recycled or FSC or PEFC certified (exception for Straubing plant).
- ▶ Paper must be printed on both sides.
- ▶ Printing technology must be offset or digital and made by a professional supplier.
- ▶ Paper size is a mix between ISO and American standards, with 2mm of tolerance.
- ▶ Exceptions are mentioned in the "Special requirements" field.
- ▶ Do not use printing inks containing mineral oil. Prohibited substances are:
 - MOAH (Mineral Oil Aromatic Hydrocarbons) with 1-7 aromatic rings for printing inks;
 - MOSH (Mineral Oil Saturated Hydrocarbons) with 16-35 carbon atoms for printing inks.


Special Requirements:



ECR F03X400511
 Release date

NOTE: For questions regarding the information in these print instructions or about the corresponding document, please contact

Author and department CAA6OVR	Product family EVOLVE Dolly	Document version 02
Pages number 2	SAP number F01U434573	Color Grayscale
Template (paper size) Small Flyer Text, A4	Paper 80g/m2 IOR	Cover same as paper weight

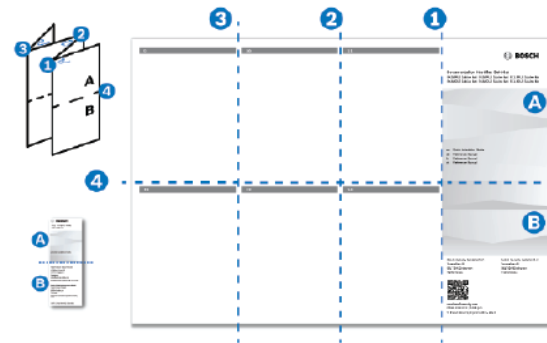

Small Flyer, A4

Paper Size 210x297mm

Fold in accordian style (numbers 1 to 3) then fold in half (number 4)

Folded Paper size ~105x75mm



Safety

- Use only with EVOLVE 70 and EVOLVE 90 column loudspeaker systems.
- Do not attach the dolly board to the column loudspeaker system while assembled. Remove the column and the distance pole before attaching the dolly board.
- Do not move the column loudspeaker system while assembled. Remove the column and the distance pole before transport.

Caution!

To maintain tip-over stability, use only on dry, flat, level surfaces. Do not use on angled or loose surfaces. Doing so may result in instability and the product to tip over resulting in damage, and/or personal injury.

Warning!

Use of non-authorized accessories or attachments with this or any Electro-Voice product is at your own discretion. Use of non-authorized accessories or attachments can result in product malfunction, injury, or death.

The user assumes all liability and may result in the warranty being voided.

Features

- Plywood dolly board with four heavy-duty casters
- Secure attachment to the subwoofer
- Quick detach hardware and lockable rear casters
- Able to operate system without removal
- Can be used together with the EVOLVE subwoofer slip covers
- Stackable when not in use
- Available in black

Installation


To attach the dolly board:




Notice!

If you have an EVOLVE slip cover, place the slip cover on the subwoofer before attaching the dolly board.


1. Tip the subwoofer onto the rear of the enclosure. Ensure that the subwoofer is resting on the rubber bumpers on the rear panel.

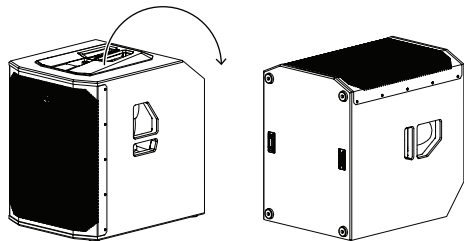

2. Align the feet of the subwoofer with the counterpart recess on the dolly board.
3. Align the catch plates on the subwoofer with the attachment hardware on the dolly board. You may have to rotate the bottom casters to avoid interference with the ground.

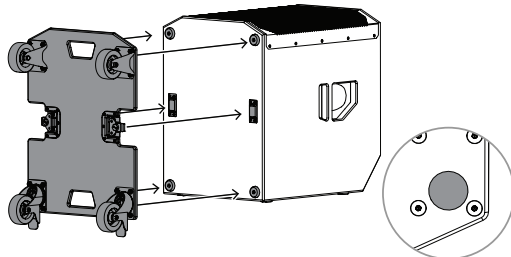


4. Turn the butterfly twist latches clockwise to tighten and to attach the dolly board to the bottom of the subwoofer enclosure. Ensure that both butterfly twist latches are secured.

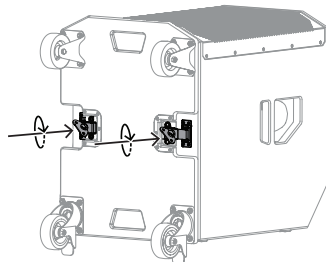


Warning!

Always use both butterfly twist latches to attach the dolly board.

5. Flip the butterfly twist latches to the flattened closed position.

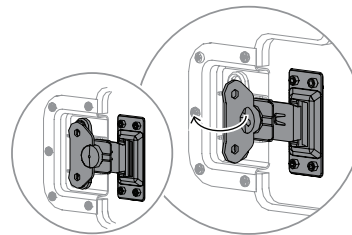

6. Tip the subwoofer enclosure back up onto the wheels.

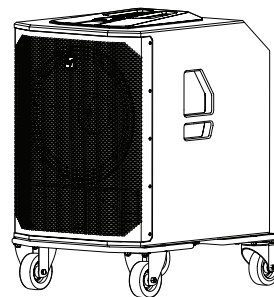

Notice!

It is possible to operate the column loudspeaker system while attached to the dolly board. Before operation ensure the caster locks of the dolly board are engaged.



A small decrease in bass response may result when operating the column loudspeaker system on the dolly board. For maximum bass performance remove the subwoofer from the dolly board and place it directly on the floor.

Technical data

	EVOLVE70-DOLLY EVOLVE70 Dolly
Material	Plywood
Color	Black
Maximum load (lb)	138 lb
Maximum load (kg)	62.50 kg
Dimensions (H x W x D) (in) ¹	5.63 in x 18.9 in x 24.4 in
Dimensions (H x W x D) (mm)	143 mm x 480 mm x 620 mm
Shipping dimensions (H x W x D) (in)	7.48 in x 19.7 in x 25.6 in
Shipping dimensions (H x W x D) (mm)	190 mm x 500 mm x 650 mm
Weight (lb)	14.60 lb
Weight (kg)	6.60 kg
Shipping weight (lb)	19 lb
Shipping weight (kg)	8.60 kg

	EVOLVE90-DOLLY EVOLVE90-DOLLY
Material	Plywood
Color	Black
Maximum load (lb)	138 lb
Maximum load (kg)	62.50 kg
Dimensions (H x W x D) (in) ¹	5.63 in x 21.26 in x 27.28 in
Dimensions (H x W x D) (mm)	143 mm x 540 mm x 693 mm
Shipping dimensions (H x W x D) (in)	7.48 in x 22.05 in x 28.46 in
Shipping dimensions (H x W x D) (mm)	190 mm x 560 mm x 723 mm
Weight (lb)	16.50 lb
Weight (kg)	7.50 kg
Shipping weight (lb)	20.50 lb
Shipping weight (kg)	9.30 kg

¹ Height includes casters

EVOLVE Dolly Board
EVOLVE70-DOLLY, EVOLVE90-DOLLY

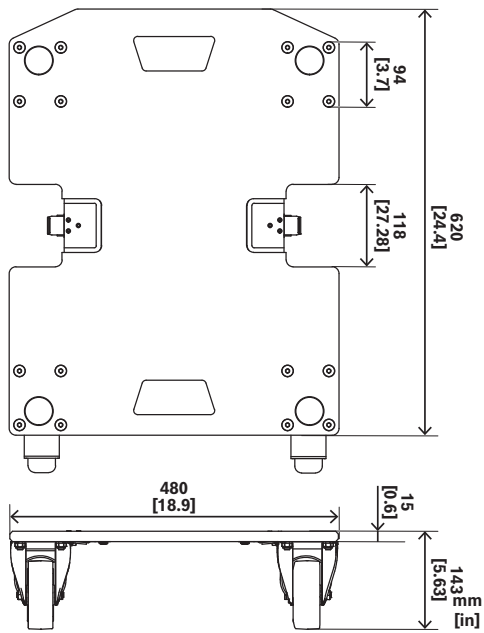
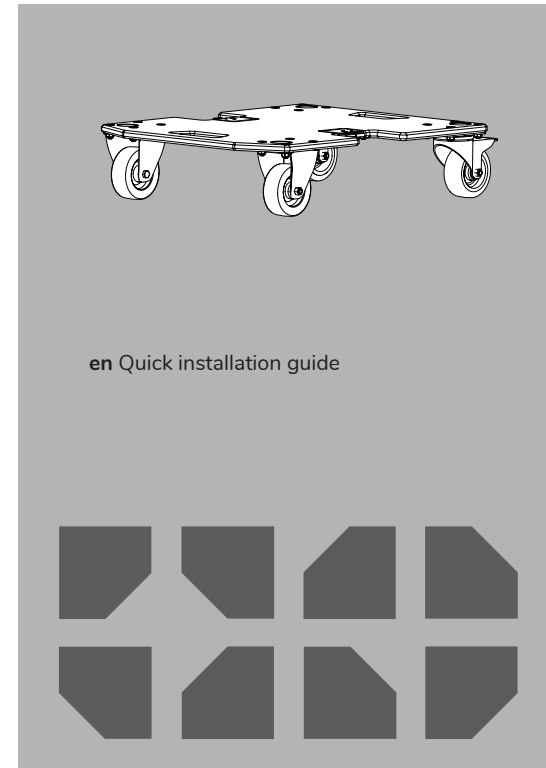


Fig. 1: EVOLVE70-DOLLY

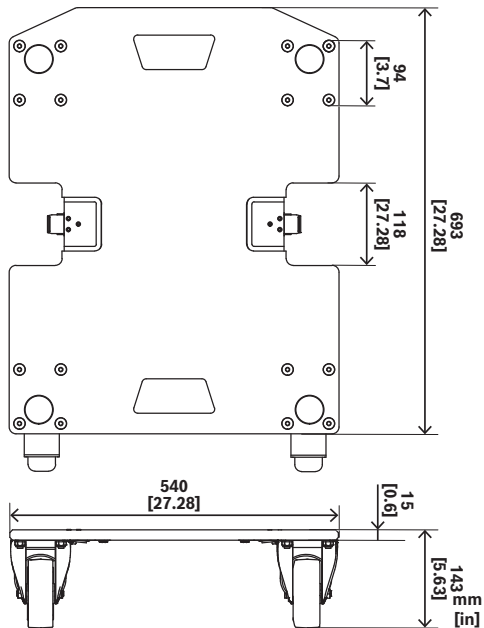


Fig. 2: EVOLVE90-DOLLY

Bosch Security Systems, LLC

130 Perinton Parkway

Fairport, NY 14450

USA

www.electrovoice.com

© Bosch Security Systems, LLC, 2025

EU importer:

Bosch Sicherheitssysteme GmbH

Robert-Bosch-Platz 1

70839 Gerlingen

Germany

© Bosch Sicherheitssysteme GmbH, 2025

2025-07 | 02 | F.01U.434.573 | 202507221140



F.01U.434.573