

EVID-S4.2T speaker 4" cabinet 70/100V pair



- Innovative mount system is included for quick, simple, and reliable installations
- Carefully engineered for outdoor environments (IP54), without compromising performance
- Long throw 4" (102 mm) woofer housed in a fire rated ABS plastic enclosure for extended LF performance down to 75 Hz



The EVID-S4.2T from Electro-Voice is a high-performance, two-way, full-range, 4-inch (102 mm) surface mount speaker with excellent wide, uniform coverage, and outstanding performance. It is designed for background and foreground music, paging, and sound reinforcement, in a wide variety of indoor and outdoor applications, such as restaurants, bars, patios, retail, fitness clubs, hospitality, theme parks, leisure venues, and others. With unparalleled ease-of-installation, sturdy weather resistance, modern and delicate look, and flexible mounting options, the EVID-S4.2T is the perfect solution for a wide variety of surface mount applications.

The EVID-S4.2T includes the unique and innovative mount system, from Electro-Voice, making every installation quick, simple, and reliable. The mounting system allows for 90 degrees of rotation horizontally, and 45 degrees of rotation vertically, and it can be easily installed on walls and ceilings. The mounting system comes already assembled and ready to be used, ready to make any job easier.

The EVID-S4.2T utilizes a 15 W transformer, that offers a selection of 3.7 W (70 V only), 7.5 W or 15 W delivered to the speaker system using either 70 V or 100 V lines. Selection is done with a Euroblock connector on the input panel located on the rear of the speaker.

The EVID-S4.2T has been carefully engineered to excel in both indoor and outdoor environments. The superior design strikes the perfect balance between durability and performance, making it an ideal choice for various applications. With an impressive IP54 rating, the EVID-S4.2T demonstrates exceptional weather resistance, guarding against sun, salt, and moisture for reliable operation even in challenging outdoor conditions.

For those seeking the ultimate level of resilience, the EVID-S5.2X is designed to conquer the toughest weather scenarios, raising the bar in weather-proofing technology. With an impressive IP65 rating and a marine-grade aluminum grille, the EVID-S5.2X offers unparalleled protection against sun, salt, and moisture, ensuring unfaltering performance even in the most extreme environments. Whether you require audio reinforcement in coastal areas, poolside settings, or any location where the elements can be unforgiving, the EVID-S5.2X guarantees a premium audio experience that remains uncompromised.

Choose the EVID-S4.2T for exceptional weather resistance and outstanding performance in a wide range of indoor and outdoor settings. For those who demand the utmost durability and resilience, the EVID-S5.2X stands as the ultimate choice. Our surface mount speaker lineup has you covered, providing reliable solutions for any audio needs, regardless of the conditions.

All EVID models are available in black or white, and can be easily painted to match the décor. Transformer versions are also available for constant voltage systems. The wide range of EVID surface mount speakers has been designed to work together as a complete system in a variety of different surface mount constructions, and to be used in combination with other EVID ceiling and in-wall speakers.

Technical specifications

Frequency response (-3 dB): 100 Hz - 20 kHz¹

Frequency response (-10 dB): 75 Hz - 20 kHz¹

Sensitivity: 86.5 dB²

Max SPL (calculated): 98.5 dB (104.5 dB Peak)
Coverage angle: Horizontal 110°, Vertical 110°
Power handling: 15 W (60 W Peak) Continuous Pink Noise (100 hours)
Low Z: No
Recommended High-Pass: 70 Hz (24 dB/octave)
Input transformer (70V/100V): 15 W
Transformer taps: 70 V: 3.7 W, 7.5 W, 15 W 100 V: 7.5 W, 15 W
LF transducer: 4 inch (102 mm)
HF transducer: 0.75 inch (20 mm)
Connectors: Captive screws on wall bracket. Max. wire size 12AWG (2.5 mm).
Environmental: IP54 (per IEC-60529)
Color: Black (RAL 9004) or white (RAL 9003)
Dimensions (H x W x D): 193 mm x 140 mm x 118 mm (7.6 in x 5.5 in x 4.7 in) ³
Net weight: 1.8 kg (4.0 lb)
Shipping weight (pair): 5.4 kg (11.9 lb)
Included hardware: Mounting bracket and 4-mm Allen wrench
Packaged quantity: 2

¹Half-space (wall mounting).
²Half-space (on wall) averaged 100 Hz - 10 kHz, 1 W.
³Without brackets.

Architectural and engineering specifications:

The loudspeaker shall be a surface mount, two-way, full-range system, with an internal passive crossover. The loudspeaker's low-frequency transducer shall be a 4" (102 mm) woofer, with a weather resistant poly propylene cone, and a 1" (25 mm) voice-coil. The loudspeaker's high-frequency transducer shall be a 0.75" (20 mm) Ferro fluid cooled driver.

The loudspeaker system shall meet the following performance criteria: Power handling, 15 W of IEC 60268-5 continuous pink noise (6 dB crest factor); Frequency response, 75 Hz - 20 kHz (-10 dB from rated sensitivity); Sensitivity, 86.5 dB at one watt, 100 Hz - 10 kHz at one meter.

The loudspeaker shall have a transformer suitable for use on 70 V or 100 V distributed lines. The transformer shall have taps ranging from 3.7 W to 15 W, selectable using a Euroblock connector on the rear of the enclosure.

The high-frequency transducer shall drive a waveguide to cover evenly 110° horizontally by 110° vertically. The finish shall be paintable black (RAL 9004) or paintable white (RAL 9003). The grille shall be zinc plated, and powder coated for corrosion resistance. The


loudspeaker shall be adjustable over a range of 90° horizontally and 45° vertically. The support bracket shall be integral with the enclosure.

The loudspeaker shall have a ball-and-socket mounting system with a quick attach and detach operation. Electrical connections shall be through the wall-portion of the mounting system, and there should be no exposed wire.


The system shall be weather resistant to IEC 60068-2-5 Solar Radiation, IEC 60068-2-11 Salt Mist, IEC 60068-2-42 SO2, IEC 60068-2-60 Chlorine, and IEC 60529 IP54 test conditions. The mounting system shall be EIA 636 tested, at a safety factor of 8:1 or better. The enclosure shall be molded of fire rated ABS plastic. The loudspeaker shall weigh 1.8 kg (4.0 lb) and its dimensions shall be 193 mm (7.6 in) high, 140 mm (5.5 in) wide, and 118 mm (4.7 in) deep.

The surface mount loudspeaker shall be the EVID-S4.2T model from Electro-Voice.

Dimensions:

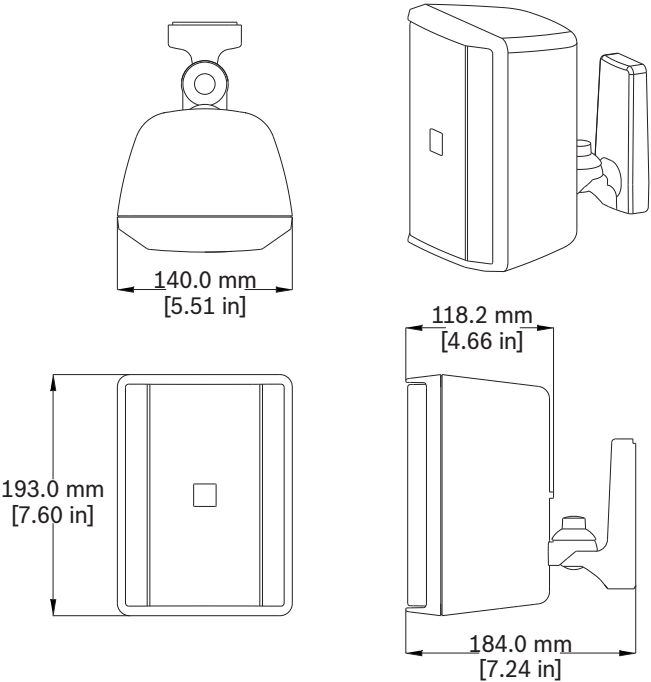

Frequency response and impedance:

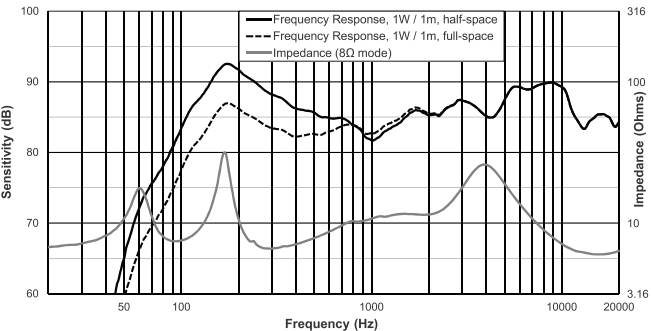

Ordering information

EVID-S4.2TB Surface mount speaker 4" 70/100V bk pair

Two-way 4-inch surface mount loudspeaker with easy wall-mount system, internal 15 W 70/100-volt line transformer, weather-resistant IP54 (packaged in pairs), black

Order number **EVID-S4.2TB | F.01U.332.732**

EVID-S4.2TW Surface mount speaker 4" 70/100V wh pair

Two-way 4-inch surface mount loudspeaker with easy wall-mount system, internal 15 W 70/100-volt line transformer, weather-resistant IP54 (packaged in pairs), white

Order number **EVID-S4.2TW | F.01U.332.733**

Represented by:

Germany:

Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.electrovoice.com

Bosch Security Systems, LLC
12000 Portland Avenue South
Burnsville MN 55337
USA