

EVID-S5.2X speaker 5" cabinet 70/100V IP65

- Carefully engineered for the toughest weather conditions (IP65)
- Long throw 5.25" (133 mm) woofer housed in a UL 94-5VB fire rated ABS plastic for extended LF performance down to 55 Hz
- 75 W power handling provides for 108 dB maximum SPL (114 dB Peak)
- 60 W transformer with 8 Ω pass-through
- EN 54-24 and UL1480



The EVID-S5.2X, from Electro-Voice, is a high-performance, two-way, full-range, 5.25-inch (133 mm) surface mount speaker with excellent wide, uniform dispersion, and outstanding performance. It is designed for background and foreground music, voice evacuation, paging, and sound reinforcement, and it's ideal for a wide variety of indoor and outdoor applications, such as restaurants, bars, patios, retail, fitness clubs, hospitality, theme parks, leisure venues, and others. With unparalleled ease-of-installation, exceptional weather resistance, modern and delicate look, and its flexible mounting options, the EVID-S5.2X is the perfect solution for a wide variety of surface mount applications.

The EVID-S5.2X is designed to conquer the toughest weather scenarios, raising the bar in weather-proofing technology. With an impressive IP65 rating and a marine-grade aluminum grille, the EVID-S5.2X offers unparalleled protection against sun, salt, and moisture, ensuring unfaltering performance even in the most extreme environments. Whether you require audio reinforcement in coastal areas, or any location where the elements can be unforgiving, the EVID-S5.2X guarantees a premium audio experience that remains uncompromised.

The EVID-S5.2X includes a versatile U-Bracket that has been designed with the installer in mind, allowing for a wide range of installation applications. The U-Bracket allows for 80 degrees of rotation.

The EVID-S5.2X utilizes a 60 W transformer, that offers a selection of 8 W (70 V only), 15 W, 30 W or 60 W delivered to the speaker system using either 70 V or 100 V lines, or 8 Ω bypass for low impedance lines. Selection is done with a convenient switch on the input panel located on the rear of the speaker.

The wide range of EVID surface mount speakers has been designed to work together as a complete system in a variety of different surface mount constructions, and to be used in combination with other EVID ceiling and in-wall speakers.

Technical specifications

Frequency response (-3 dB): 90 Hz - 20 kHz ¹
Frequency response (-10 dB): 55 Hz - 20 kHz ¹
Sensitivity: 89 dB ²
Max SPL (calculated): 108 dB (114 dB Peak)
Coverage angle: Horizontal 90°, Vertical 90°
Power handling: 75 W (300 W Peak) Continuous Pink Noise (100 hours) 24.5 Vrms
Low Z: Yes
Nominal impedance: 8 Ω
Minimum impedance: 6.5 Ω
Recommended high-pass: 60 Hz (24 dB/octave)
Input transformer (70 V/100 V): 60 W
Transformer taps: 70V: 60 W, 30 W, 15 W, 8 W, 8 Ω 100V: 60 W, 30 W, 16 W, 8 Ω
Low frequency transducer: 5.25 in (133 mm)
High frequency transducer: 0.75 in (20 mm)
Connectors: Removable locking 4-pin connector (Euroblock) - (2) for connection to additional speakers in a distributed line. Max. wire size 12AWG (2.05 mm Ø)
Environmental: IP-65 (per IEC-60529)

Color: Black (RAL 9004) or white (RAL 9003)
Operating temperature range: -25 C° to 55 C°
Operating humidity range: 5% to 95%
Dimensions (H x W x D): 255 mm x 180 mm x 148 mm (10.0 in x 7.1 in x 5.8 in) ³
Net weight: 3.2 kg (7.1 lb) ³
Shipping weight: 9.5 kg (21.0 lb)
Included hardware: U-Bracket, 5-mm Allen wrench and input cover
Packaged quantity: 2

¹Half-space (wall mounting).

²Half-space (on wall) averaged 100 Hz - 10 kHz, 1 W.

³Without U-Bracket.





Notice

Reference axis: Axis is on the center of grille surface and perpendicular to the grille surface. Reference plane: Plane is on the grille surface and perpendicular to the reference axis. Horizontal plane: Plane is containing the reference axis and perpendicular to the reference plane.




Notice


For specific EN54-24 and UL1480 specifications, reference the user manual.

 0905 Bosch Security Systems LLC. 130 Perinton Pkwy, Fairport, NY, 14450, USA 19 0905-CPR-00816 EN 54-24:2008 Loudspeaker for voice alarm systems for fire detection and fire alarm systems for buildings Ceiling loudspeakers EVID-S5.2XB, EVID-S5.2XW Type B See product manual F.01U.345.358 for further installation information.	 0359 Bosch Security Systems LLC. 130 Perinton Pkwy, Fairport, NY, 14450, USA 0359-UKCA-CPR-00150
---	--

Frequency response and impedance:

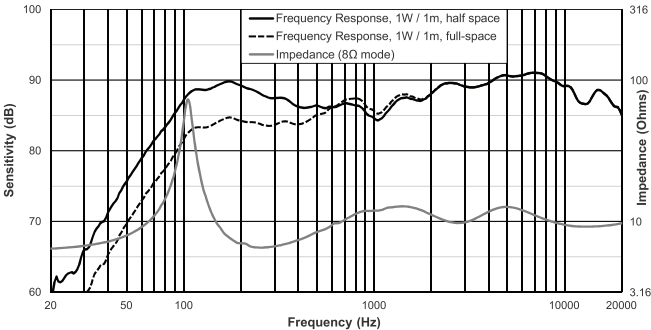

Dimensions:

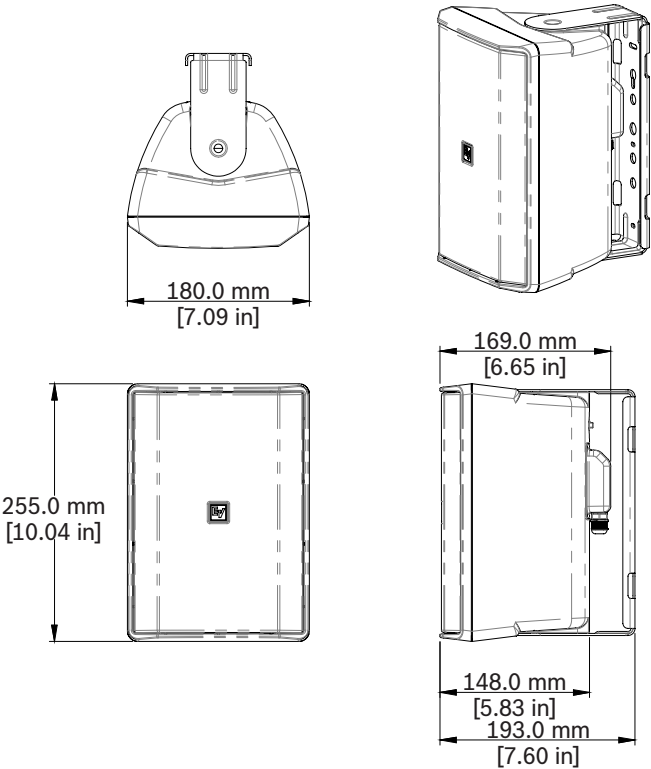

Architectural and engineering specifications:

The loudspeaker shall be a surface mount, two-way, full-range system, with an internal passive crossover. The loudspeaker's low-frequency transducer shall be a 5.25" (133 mm) woofer, with a weather resistant poly propylene cone, and a 1" (25 mm) voice-coil. The loudspeaker's high-frequency transducer shall be a 0.75" (20 mm) Ferro fluid cooled driver, coupled to a baffle-integrated waveguide. The loudspeaker system shall meet the following performance criteria: Power handling, 75 W of IEC 60268-5 continuous pink noise (6 dB crest factor); Frequency response, 55 Hz - 20 kHz (-10 dB from rated sensitivity); Sensitivity, 89 dB at one watt, 100 Hz - 10 kHz at one meter; Impedance, 8 Ohm nominal, 6.5 Ohm minimum. The loudspeaker shall have a transformer suitable for use on 70 V or 100 V distributed lines. The transformer shall have taps ranging from 8 W to 60 W, plus an 8 Ohm bypass, selectable using a switch on the rear of the enclosure. The 8 Ohm bypass selection shall be protected by a safety screw. The high-frequency transducer shall drive a waveguide to cover evenly 90° horizontally by 90° vertically. The finish shall be black (RAL 9004) or white (RAL 9003). The grille shall be marine grade aluminum. The loudspeaker shall be adjustable over a range of 90° vertically, using a U-Bracket. The loudspeaker shall have an included U-Bracket. The U-Bracket shall be marine grade aluminum. Electrical connections shall be through a 4-pin detachable

Euroblock connector on the input panel. The loudspeaker should include an IP65 weather cover for the input panel.

The system shall be weather resistant to IEC 60068-2-5 Solar Radiation, IEC 60068-2-11 Salt Mist, IEC 60068-2-42 SO₂, IEC 60068-2-60 Chlorine, and IEC 60529 IP65 test conditions. The mounting system shall be EIA 636 tested, at a safety factor of 8:1 or better. The enclosure shall be molded of UL UL94-5VB fire rated ABS plastic. The loudspeaker shall weigh 3.2 kg (7.1 lb) and its dimensions shall be 255 mm (10.0 in) high, 180 mm (7.1 in) wide, and 148 mm (5.8 in) deep.

The surface mount loudspeaker shall be the EVID-S5.2X model from Electro-Voice.

Ordering information

EVID-S5.2XB Surface speaker 5" 70/100V IP65 bk pair

Two-way 5-inch surface mount loudspeaker with easy wall-mount system, internal 60 W 70/100-volt line transformer with 8 Ohm bypass, weatherproof IP65. EN 54-24 and UL1480 certified (packaged in pairs), black
Order number **EVID-S5.2XB | F.01U.332.738**

EVID-S5.2XW Surface speaker 5" 70/100V IP65 wh pair

Two-way 5-inch surface mount loudspeaker with easy wall-mount system, internal 60 W 70/100-volt line transformer with 8 Ohm bypass, weatherproof IP65, EN 54-24 and UL1480 certified (packaged in pairs), white
Order number **EVID-S5.2XW | F.01U.332.739**



<https://www.electrovoice.com>