


## Installing with the threaded rod adapter

### Warning!

Suspending any object is potentially dangerous and should only be attempted by individuals who have a thorough knowledge of the techniques and regulations of suspending objects overhead. Electro-Voice strongly recommends that loudspeakers be suspended taking into account all current national, federal, state, and local laws and regulations. It is the responsibility of the installer to ensure all loudspeakers are safely installed in accordance with all such requirements. When loudspeakers are suspended, Electro-Voice strongly recommends the system be inspected at least once per year or as laws and regulations require. If any sign of weak-



4. Screw **jam-nut** down until it contacts the surface of the threaded rod adapter.  
*Fully tighten against each other.*



5. Insert **pendant mounting plate** into threaded rod mounting slot.

ness or damage is detected, remedial action should be taken immediately. The user is responsible for making sure the wall, ceiling, or structure is capable of supporting all objects suspended overhead. Any hardware used to suspend a loudspeaker not associated with Electro-Voice is the responsibility of others.




### Notice!

Use a steel threaded rod size 7/16"-20.

To **install using a threaded rod**, do the following:


1. Mount **threaded rod** (not included) to ceiling.  
*We highly suggest double nutting the threaded rod, whenever possible.*

6. Insert the **threaded rod adapter locking screw** through the adapter holes and speaker mounting plate center hole.




7. Tighten **nylon locking nut** to the other end of the suspension screw.


2. Screw **jam-nut** (not included) on the speaker end of the threaded rod on.  
*Leave enough space to screw the adapter.*



3. Screw **adapter** into threaded rod at least 3/4".  
*Align mounting slot, if needed.*



8. Attach a **secondary auxiliary support cable** (not included) onto one of the suspension tab side holes in the top of the speaker.

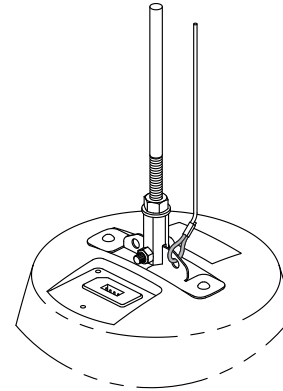

9. Secure the **secondary auxiliary support cable** (not included) to a different ceiling support point of the building structure.

09

10

11

**TR-P Threaded rod adaptor for pendant**



**en** Quick Installation Guide

12

13

14



**Bosch Security Systems, Inc**  
12000 Portland Avenue South  
Burnsville MN 55337  
USA

**www.electrovoice.com**  
© Bosch Security Systems, Inc, 2018

**Bosch Sicherheitssysteme GmbH**  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Germany  
© Bosch Sicherheitssysteme GmbH, 2018