

Model FMK Flange Mount Kit




Step Up To
Electro-Voice®

General Description

The FMK flange mount kit is a permanent mounting accessory for the CP212 and CP218 podium microphone. The kit consists of a mounting flange, washer, nut, and three set screws, and is designed for installation into panel up to 3/4-inch thick,

Mounting a CP212 or CP218 is quick and easy using the FMK mounting kit.

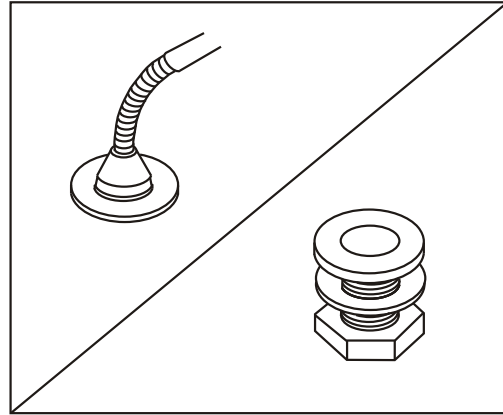

Installation

1. Select the microphone location by first checking for obstructions under the panel that will interfere with the microphone and for a flat surface to properly seat the washer and retaining nut. Panel thickness may not exceed $\frac{3}{4}$ inch.
2. Drill a 1 $\frac{1}{8}$ -inch hole at the microphone location.
3. Set the roll-off switch on the microphone to the desired response.
4. Insert the microphone into the fixed mount adapter; secure by tightening the three set screws.
5. Insert the adapter into the drilled hole; secure this assembly with panel washer and retaining nut. Do not over-torque the retaining nut. Attach the microphone connector. For depth restrictions, a right angle audio connector may be required.

Warranty

Electro-Voice Accessories are guaranteed for one year from date of original purchase against malfunction due to defects in workmanship and materials. If such malfunction occurs, unit will be repaired or replaced (at our option) without charge for materials or labor if delivered prepaid to the proper Electro-Voice service facility. Unit will be returned prepaid. Warranty does not extend to finish, appearance items or malfunction due to abuse or operation under other than specified conditions, nor does it extend to incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you.

Repair by other than Electro-Voice or its authorized warranty service agencies will void this guarantee.

A list of authorized service representatives is available from EVI Audio Service at:

12000 Portland Ave. South,
Burnsville, MN 55337
Phone: (952) 884-4051, (800) 828-6107
Fax: (952) 887-9212

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Specifications subject to change without notice.



12000 Portland Avenue South, Burnsville, MN 55337

Phone: 952/884-4051, Fax: 952/884-0043

www.electrovoice.com

©Telex Communications, Inc. 2003

Part Number 531646, Rev B

U.S.A. and Canada only. For customer orders, contact the Customer Service department at:

800/392-3497 Fax: 800/955-6831

Europe, Africa and Middle East only. For customer orders, contact the Customer Service department at:

49 9421-706 0 Fax: 49 9421-706 265

For Warranty information, contact the Service Repair department at:

402-467-5321 or 800-553-5992

For technical assistance, contact Technical Support at: **800-392-3497**

*Specifications subject to change without notice