

Product registration



Register your EVIVA: electrovoice.com/register

Quick setup

The EVIVA series loudspeakers from Electro-Voice are fully integrated audio systems with carefully matched electronics and transducers. These products make it easy to setup a high quality sound system quickly with a minimum amount of cables and external electronics.

Step	Illustration
1. Connect the AC power cord from a grounded line receptacle to the MAINS IN.	
2. Connect the XLR or TRS cable from an audio source to INPUT 1 or INPUT 2.	
3. Adjust the input gain to $-\infty$ (infinity).	
4. Switch POWER to ON.	

Step	Illustration
5. Increase the input gain to the desired signal level. If the SIG / PEAK indicator turns to red, reduce the corresponding input level control.	
6. Adjust the MASTER VOLUME control knob to the desired volume. Be mindful of the LIMIT indicator.	

Wireless streaming

For EVIVA12P and EVIVA15P models, follow these instructions to quickly and correctly pair and tune your system for wireless streaming from a Bluetooth®-enabled mobile device.

Prior to pairing:

- ▶ Ensure that Bluetooth® is enabled on your mobile device.

To pair the system for wireless streaming:

- Using the **MASTER VOLUME** knob, turn the output gain level down to $-\infty$ (infinity).
- Press and hold **PUSH & HOLD TO PAIR** button to enter pairing mode.
Bluetooth indicator is flashing during pairing mode. When the **Bluetooth** indicator is solid illuminated, Bluetooth connection is established.
- In the mobile device, navigate to the Bluetooth menu, and select EVIVA 12P (or 15P). Each speaker has a 4-digit unique identifier after the model name. The 4-digit unique identifier (**Bluetooth ID**) can be found on the white label on the rear of the speaker.

Gain structuring

After pairing your mobile device with the system, you can set the volume for your streaming device.

To set the volume for your streaming device:

- Set the loudspeaker output gain to $-\infty$ (infinity).
- Start playing music from your desired player/source.

- Increase the volume from your device to at least 75%.
- Using the **MASTER VOLUME** control knob, increase the output gain to the desired listening level. Be mindful of the **LIMIT** indicator.
- Turn the level down on your device for convenient volume control (optional).

Tripod, pole mount and floor monitor operation



Caution!

We recommend that two or more persons lift and place heavier loudspeakers. Single person lift and placement of heavier loudspeakers could cause injury.



Caution!

Do not stack additional loudspeakers.

Tripod or pole mount

EVIVA portable loudspeakers mount on a tripod stand or on a pole above a subwoofer.

Mounting a loudspeaker on a tripod stand




Caution!


Tripod is not evaluated for safety with this loudspeaker. Check the specifications of the tripod stand to be certain it is capable of supporting the weight of the loudspeaker.

To mount a loudspeaker on a tripod stand, do the following:

- Place the tripod stand on a level and stable surface.
 - Fully extend the legs on the tripod stand.
 - Do not compromise the tripod stand's structural integrity by trying to make the stand taller.
 - Do not attempt to mount more than one loudspeaker on a stand designed for a single loudspeaker.
- Lift the loudspeaker using two hands.
- Set the pole cup located on the bottom of the loudspeaker onto the pole.



Mounting a loudspeaker on a pole



To mount a loudspeaker on a pole, do the following:

- Place the subwoofer on a level and stable surface.
- Insert the pole into the pole cup on the top of the subwoofer.
If you are using a threaded pole mount, turn the pole clockwise to secure the pole to the subwoofer.
- Lift the loudspeaker using two hands.
- Set the pole cup located on the bottom of the loudspeaker onto the pole.

Floor monitor

EVIVA loudspeakers may be used as a floor monitor by placing the loudspeaker on one integrated monitor angle.


To set up a loudspeaker as a floor monitor:

- Place the loudspeaker on a level and stable surface.
- Safely route cables to prevent injury to performers, production crew, and audience members.



Notice!

Secure cables with wire ties or tape whenever possible.

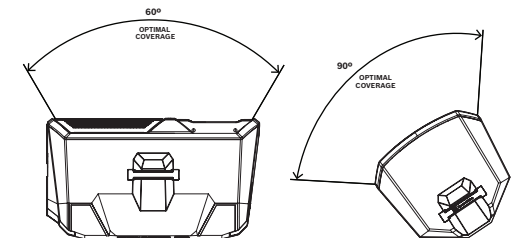


Warranty information

For information on warranty periods and after sales service, please visit: www.electrovoice.com/warranty

EVIVA powered speakers and subwoofer

EVIVA 12P, EVIVA 15P, EVIVA 18SP

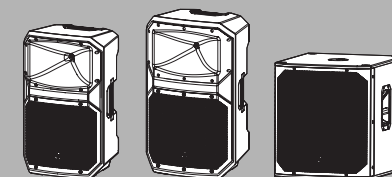

en Quick user guide



Bosch Security Systems, LLC

130 Perinton Parkway
Fairport, NY 14450
USA

www.electrovoice.com

© Bosch Security Systems, LLC, 2025

EU importer:

Bosch Sicherheitssysteme GmbH

Robert-Bosch-Platz 1
70839 Gerlingen
Germany

© Bosch Sicherheitssysteme GmbH,
2025