



ZLX-G2-BRKT Wall mount bracket, ZLX G2 2-way mode

- Used to mount a 12-inch or 15-inch ZLX-G2 loudspeaker to a wall, ceiling, pole, pipe, or truss.
- Includes four types of slots for different mounting types.
- Made out of steel, in black.

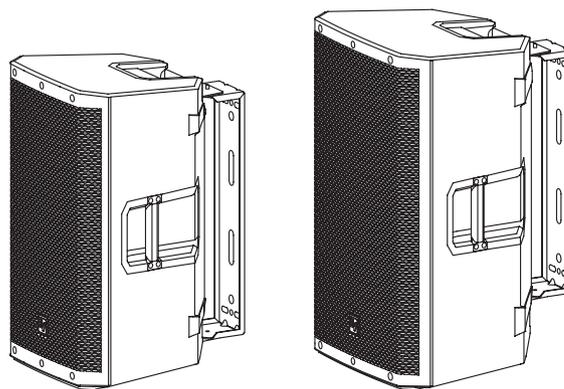

The ZLX-G2-BRKT is used to mount a ZLX-12-G2, ZLX-12P-G2, ZLX-15-G2, or ZLX-15P-G2 full-range loudspeaker to a wall, ceiling, pole, pipe, or truss.

System overview

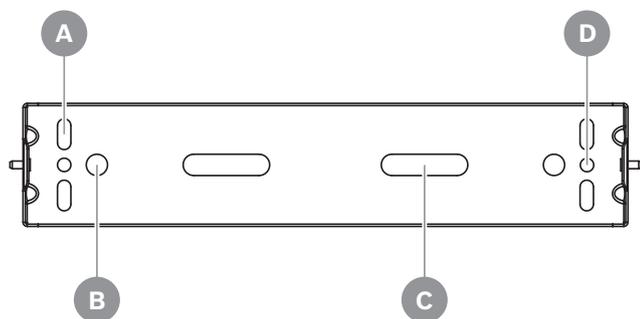

- A** For vertical or horizontal mounting using four screws OR pole/truss mounting for nominal pipe size up to 2" (DN50) using two U-bolts. Accepts fastener diameters up to 3/8" or M10.
- B** For horizontal suspension using two threaded rods up to 5/8" or M16 diameter OR pole/truss mounting using two Electro-Voice TCA-1 truss clamp adapters.
- C** For pole mounting using one U-bolt for nominal pipe size between 4" (DN100) and 6" (DN175). Accepts fastener diameters up to 5/8" or M16.
- D** For horizontal suspension using two threaded rods OR vertical or horizontal mounting using two screws. Accepts fastener diameters up to 3/8" or M10.

Parts included

Quantity	Component
1	Bracket with through hole
1	Bracket with slotted hole
1	U-bracket
2	Screw, M6 x 20, Phillips, Pan Head, Steel, Black Zinc Coating
1	Quick installation guide

Technical specifications

Color	Black
Dimensions (H x W x D) (mm)	See individual part drawing
Dimensions (H x W x D) (in)	See individual part drawing
Shipping dimensions (H x W x D) (mm)	135 mm x 160 mm x 535 mm
Shipping dimensions (H x W x D) (in)	5.31 in x 6.30 in x 21.06 in
Weight (kg)	1.44 kg
Weight (lb)	3.20 lb
Shipping weight (kg)	1.98 kg
Shipping weight (lb)	4.4 lb

Dimensions:

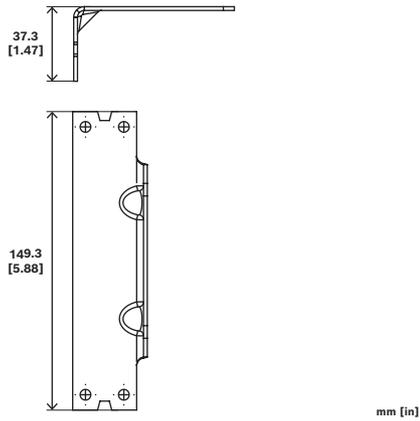


Fig. 1: Through hole bracket

Ordering information

ZLX-G2-BRKT Wall mount bracket, ZLX G2 2-way mode
 Wall mount bracket for 12-inch and 15-inch ZLX-G2
 loudspeakers, black
 Order number **ZLX-G2-BRKT | F.01U.398.947**

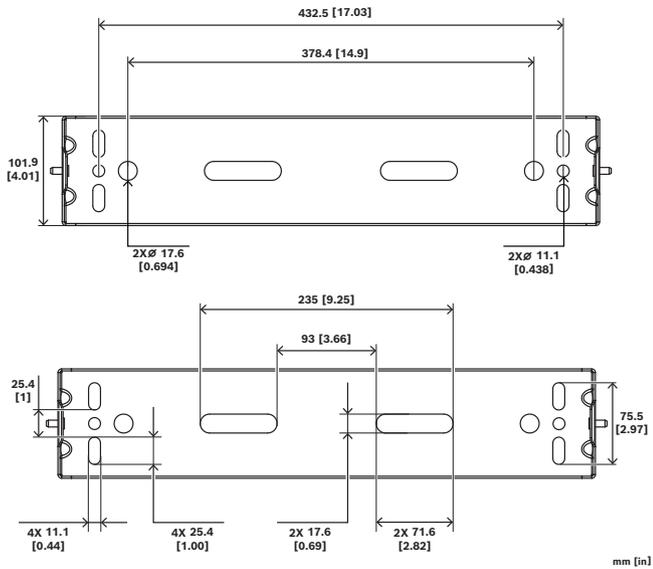


Fig. 2: U-bracket

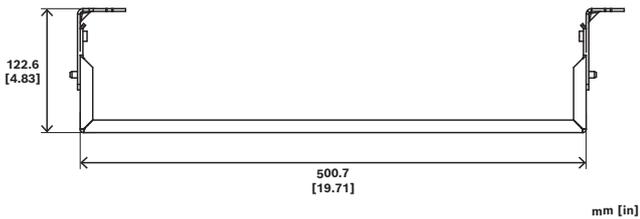


Fig. 3: U-bracket assembly

Represented by:

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany
 www.electrovoice.com

Bosch Security Systems, LLC
 12000 Portland Avenue South
 Burnsville MN 55337
 USA