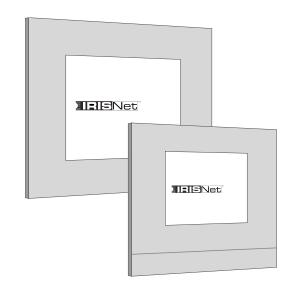## Key Features:

- Custom design of the control surface - individual configuration via IRIS-Net™, functionality and graphical representation for all kinds of applications

- Long life span and noiseless operation - no fan, no hard disk

- Reliable server technology - Win XP Embedded™ operating system, industry approved product quality.

  Additional Information can be found in the TPI owner's manual and IRIS-Net online help.

General Description:

The TPI Touch Panels are control and display interface devices for the control and monitoring of Electro-Voice NetMax systems. Two different models are available with screen diameters of 8.4" (TPI-8) or 12.1" (TPI-12). The TPI Touch Panels are configured and programed using IRIS-Net™ PC software and an Ethernet connection. The shallow depth of the assembly allows for convenient mounting into most standard walls. Rack mounting hardware and power supply pack are available separately.

Technical Specifications:

	TPI-8	TPI-12
Display Size:	8.4"	12.1"
Supply Voltage:	24 V DC +/-20%	
Supply Current:	0.7 A	0.9 A
Max. Resolution:	800 x 600	
Brightness:	300 cd/m²	
Viewing Angle (Contrast Ratio 10:1):	+/-60° hor., +60°/-40° vert.	+/-70° hor., +50°/-60° vert.
Touch Screen:	Resistive analog	
Cooling:	Fanless cooling concept	
MTBF:	> 40000 h (excluding the backlight tube)	
Operating System:	Windows XP embedded	
Operating Temp. Range:	0 °C … 40 °C	
Operating Humidity Range:	5 … 95% non-condensing	
External References:	1 x LAN 10/100, 2 x USB, 1 x VGA, 1 x COM	
Internal Drive:	CompactFlash 256 MByte	
Battery:	Lithium Type CR2032, 3.5 V, 750 mAh	
Dimensions (W x H x D):	307 x 267 x 50.7 mm	395 x 315 x 56.2 mm
Weight:	3.2 kg	5.3 kg
Options		
Wall Mount Box:	WM TPI-8 (P/N D121932)	WM TPI-12 (P/N D121933)
Power Supply:	24 V DC / 1.25 A (P/N D121789)	

Contents:

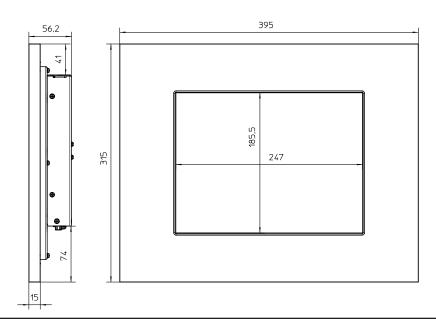| Quantity	Description
1	User Manual, TPI-8 / TPI-12
1	TPI-8 / TPI-12
1	Warranty Card
1	Touch Screen Input Pen
1	Connector, 2-pole, Phoenix MSTB 2.5/2-STF-5.08

Dimension Drawing, TPI-8:

Dimension Drawing, TPI-12:

U.S.A. and Canada only. For customer orders, contact Customer Service at:
800/392-3497 Fax: 800/955-6831
Europe, Africa, and Middle East only. For customer orders, contact Customer Service at:
+ 49 9421-706 0 Fax: + 49 9421-706 265
Other Internatonal locations. For customer orders, Contact Customer Service at:
+ 1 952 884-4051 Fax: + 1 952 887-9212
For warranty repair or service information, contact the Service Repair department at:
800/685-2606
For technical assistance, contact Technical Support at: **866/78AUDIO**

Specifications subject to change without notice.